


Thrust Ball Bearing

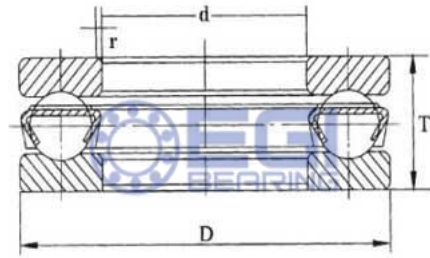

Designations		Dimensions			Weight (kg)
New code	Old code	d	D	B	
59760	59760	300	460	80	54
(2268140) 234440	(2268140) 234440	200	310	132	33.6
811/500M	91/500H	500	600	80	48
811/600M	91/600H	600	710	85	60.5
81120M	9120	100	135	25	1.06
81122M	9122	110	145	25	1.21
81124M	9124	120	155	25	1.3
81126M	9126	130	170	30	2
81128M	9128	140	180	31	2.2
81130M	9130	150	190	31	2.5
81132M	9132	160	200	31	2.7
81134M	9134	170	215	34	3.2
81136M	9136	180	225	34	3.3
81138M	9138	190	240	37	3.6
81140M	9140	200	250	37	4.43
81144M	9144	220	270	37	4.8
81148M	9148	240	300	45	7.8
81152M	9152	260	320	45	8.78
81156M	9156	280	350	53	12.5
81160M	9160	300	380	62	18
81164M	9164	320	400	63	19.5
81168M	9168	340	420	64	22.7
81172M	9172	360	440	65	22
81176M	9176	380	460	65	23.5
81180M	9180	400	480	65	24.5
81184M	9184	420	500	65	25
81188M	9188	440	540	80	38.4
81192M	9192	460	560	80	41.4
81196M	9196	480	580	80	44.2
81220M	9220	100	150	38	2.58
81222M	9222	110	160	38	2.8
81224M	9224	120	170	39	3

81226M	9226	130	190	45	4.6
81228M	9228	140	200	46	5
81230M	9230	150	215	50	6.3
81232M	9232	160	225	51	6.8
81234M	9234	170	240	55	8.5
81236M	9236	180	250	56	9
81238M	9238	190	270	62	12.3
81240M	9240	200	280	62	12.8
81244M	9244	220	300	63	13
81248M	9248	240	340	78	24.2
81252M	9252	260	360	79	26.2
81256M	9256	280	380	80	28.2
81260M	9260	300	420	95	44
81264M	9264	320	440	95	46.2
81272M	9272	360	500	110	70.5
81276M	9276	380	520	112	75.5
81280M(9280)	81280M(9280)	400	540	112	76
81284M	9284	420	580	130	111
81288M	9288	440	600	130	115.3
82735M	82735M	175	250	82	11.4
82760M	82760M	300	460	80	55
8726M	8726M	130.2	225	30	5.5
52334	52334	150	280	153	39.5
234438	2268138	190	290	120	31
2687/1049F3	2687/1049F3	1049.5	1270	220	392
51134M	8134	170	215	34	3.1
51136M	8136	180	225	34	3.17
51138F3	8138	190	240	37	4
51138M	8138	190	240	37	4
51140M	8140	200	250	37	4.3
51144M	8144	220	270	37	4.6
51152M	8152	260	320	45	7.9
51156M	8156	280	350	53	11.8
51160M	8160	300	380	62	16.2
51164M	8164	320	400	63	18.7
51172M	8172	360	440	66	23.9
51176M	8176	380	460	65	25
512/500M	82/500	500	670	135	139
51226M	8226	130	190	45	4.37
51234F3	8234	170	240	55	7.57
51234M	8234	170	240	55	7.89
51238M	8238	190	267	62	11.7
51244M	8244	220	300	63	12.6
51248M	8248	240	340	78	21.9
51252M	8252	260	360	79	24.1
51256M	8256	280	380	80	26.2
51260M	8260	300	420	95	40
51264M	8264	320	440	95	44.5
51268M	8268	340	460	96	46

51272F3	8272	360	500	110	64.7
51272M	8272	360	500	110	64.7
51284M	8284	420	580	130	110
51322M	8322	110	190	63	8
51328M	8328	140	240	80	15.1
51336M	8336	180	300	92	26.6
51338M	8338	190	320	105	34.5
51340M	8340	200	340	110	41.5
53224U	53224U	120	170	46	3.45
53226U	53226U	130	195	53	6
5617/650F3	1687/650	650	880	140	194
5617/650M	1687/650	650	880	140	194